


DBTB 传感器

DBTB

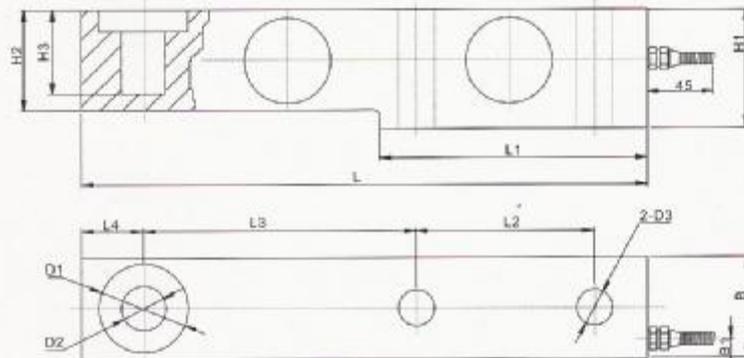

Rated Load (t)	L	L1	L2	L3	L4	H1	H2/B	D1	H3	D1	D2	D3
0.5, 1, 2, 5	209	90	64	88	33	43	39.8	7	39.5	±32	±16	±10
5	235	180	60	124	32	52	48	7	39	±38	±32	±21
10	279	193	82	140	32	67	60	6.4	30	±48	±32	±28
15,20,25	318	183	80	158	35	82.5	70	9.5	34	±54	±36	±34

Technical parameter

It can be made of Hi-temperature load cell

Rated load:	0.5,1,2,3,5,10,15,20,25t	Operating Temp Range:	-30~+70 °C
Sensitivity:	2.0±0.002 mV/V	Safe load limit:	150 %F.S
Total error:	±0.02 %F.S	Lateral load limit:	300 %F.S
Creep(30min):	±0.02 %F.S	Recommend excitation:	10~12 V DC
Zero balance:	±1 %F.S	Maximum excitation:	15 V DC
TCO:	±0.02 %F.S/10°C	Protection Class:	IP68
TC SPAN:	±0.02 %F.S/10°C	Construction:	Alloy Steel
Input resistance:	400 ±10 Ω		Stainless Steel
Output resistance:	352±2 Ω	Cable: Length:2.6m(0.5-2t),3.5m(3t),5.2m(5t),7m(10t),	
Insulation resistance:	≥5000 MΩ	12m(20t,25t) Diameter:φ6mm	