


DSQB-A/.....T Loadcell

- DSQB-A/.....T (应用领域: 平台秤、配料控制系统、低平面台秤)

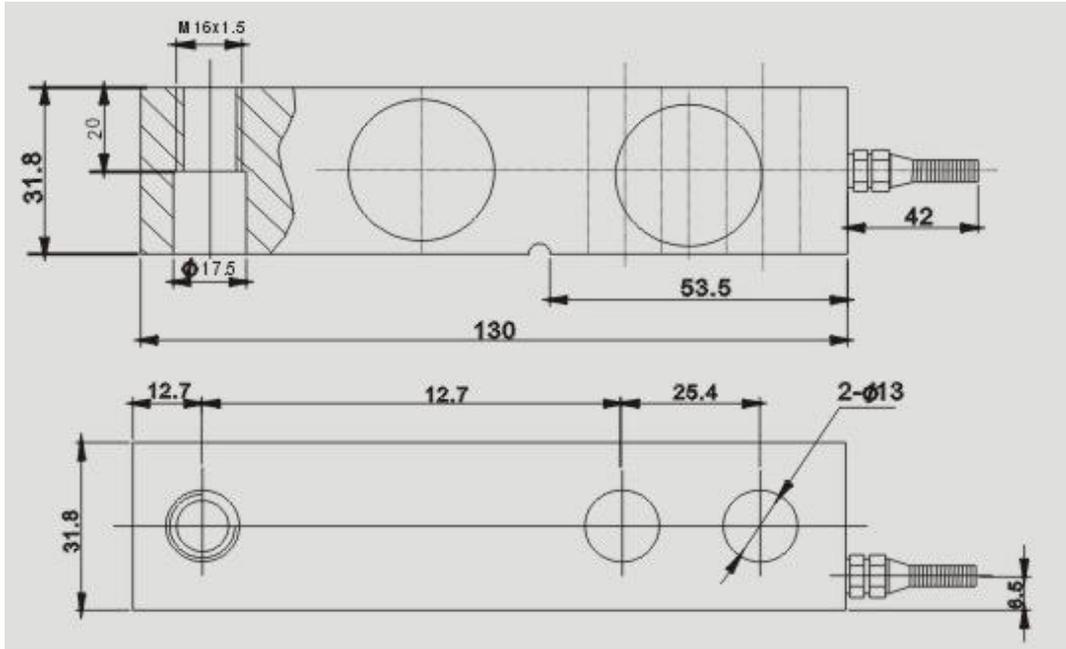

DSQB-A/.....T 技术参数

技术参数 Technical parameter

额定载荷Rated load:	0.25,0.5,0.75,1,1.5,2,2.5,3,5,7.5,10t	工作温度范围Operating Temp Range:	-30~+70 °C
灵敏度Sensitivity:	3.0±0.002mV/V	安全过载Safe load limit:	150 %F.S
综合误差Total error:	±0.02%F.S	极限过载Lateral load limit:	250 %F.S
蠕变 (30分钟) Creep(30min):	±0.02%F.S	推荐激励电压Recommend excitation:	10~12 V DC
零点平衡Zero balance:	±1 %F.S	最大激励电压Maximum excitation:	15 V DC
零点温度影响TCO:	±0.02%F.S/10°C	密封等级Protection Class:	IP67(0.25~0.75t),IP68(1~10t)
输出温度影响TC SPAN:	±0.02%F.S/10°C	材质Construction:	不锈钢Stainless Steel合金钢 Alloy Steel
输入阻抗Input resistance:	400 ±10 Ω	电缆Cable:	Length:5m
输出阻抗Output resistance:	352± 2 Ω		Diameter: φ 5mm
绝缘电阻Insulation resistance:	≥5000M Ω		Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

DSQB-A/.....T 压头附件/称重模块

