

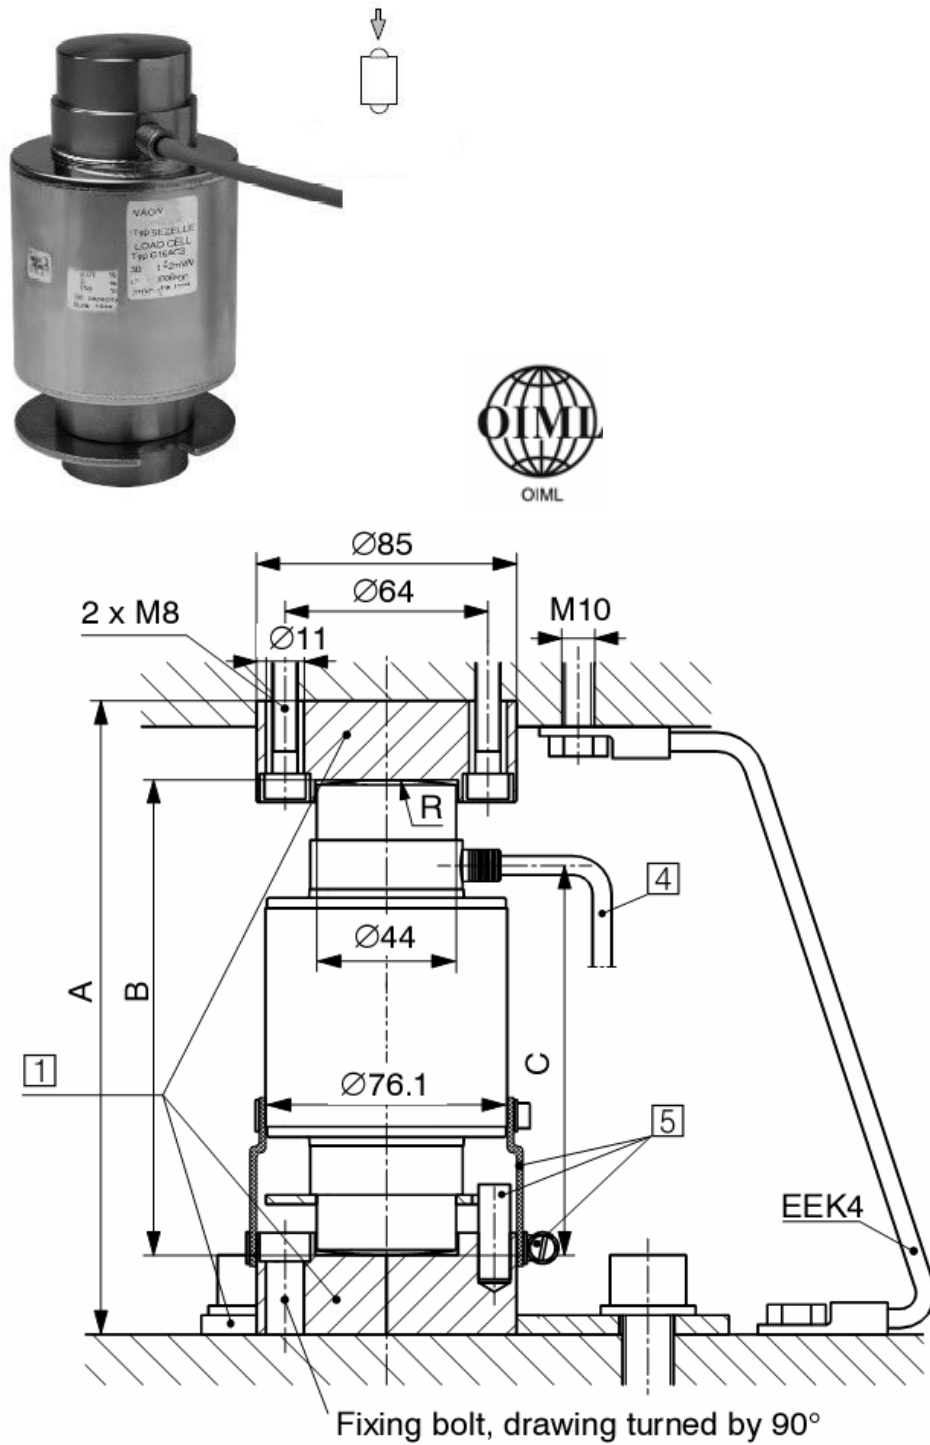


DZSF-A/...T Loadcell

- **DZSF-A/...T** (应用领域: 汽车衡、轨道衡、轴量秤、地上衡)
- **Truck scale, railway scale, axle wheel scale, floor scale**

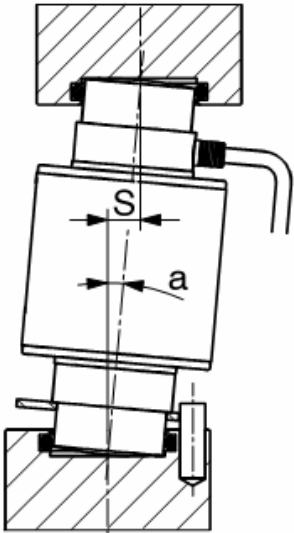

Top view

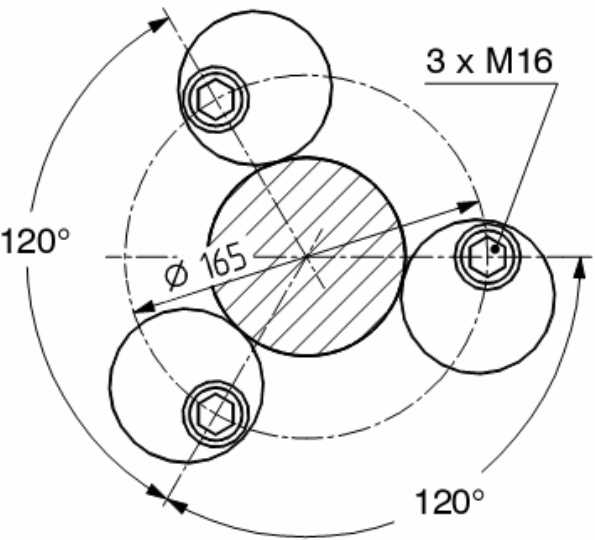

TECHNICAL PARAMETER Exc+ (红,Red);Sig+ (绿,Green);Exc- (黑,Black);Sig- (白,White)

额定载荷 Rated Load	10,15,20,25,30,40,50 t	工作温度 Operating Temp Range	-30~+70 °C
灵敏度 Sensitivity	2.0 ±0.002mV/V	安全过载 Safe load limit	150%F.S
综合误差 Total error	±0.02%F.S	极限过载 Over load limit	250%F.S
蠕变(30 分钟) Creep(30min)	±0.02%F.S	推荐激励电压 Recommend	10~12VDC
零点平衡 Zero balance	±1%F.S	最大激励电压 Maximum	15VDC
零点温度影响 TCO	±0.02% F.S/10°C	密封等级 Protection Class	IP68
输出温度影响 TC SPAN	±0.02% F.S/10°C	材质 Construction	合金钢
输入阻抗 Input resistance	400 ±10Ω	电缆 Cabie	
输出阻抗 Output resistance	352 ±3Ω	Length:10~16m	
绝缘电阻 Insulation resistance	≥5000MΩ	Diameter:	φ 5mm