


>Model HSX-A

ItemNo: HSX-A (应用领域: 料斗秤、皮带秤、配料系统)

Protection Class IP68



额定载荷 (kg) Rated Load	D
5,10,20,30,40,50,75, 100,150,200,250	Φ8.2
300,500	Φ10.2

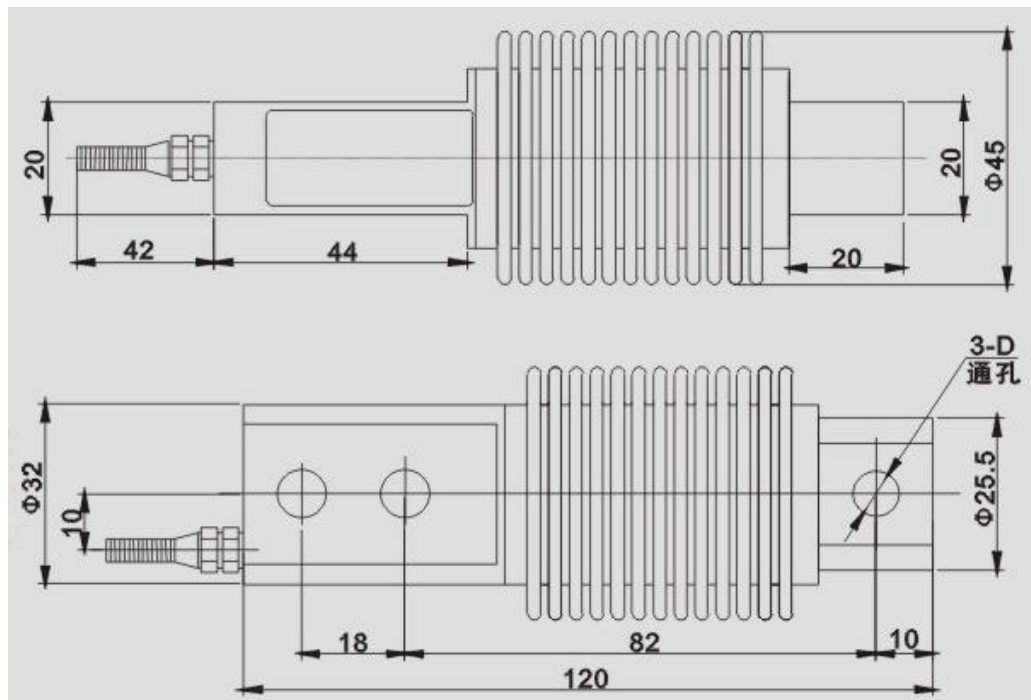

技术参数 Technical parameter

额定载荷Rated load:	5,10,20,30,40,50,75,100, 150,200,250,300,500kg	绝缘电阻Insulation resistance:	≥5000MΩ
灵敏度Sensitivity:	2.0±0.002mV/V	工作温度范围Operating Temp Range:	-30~+70℃
综合误差Total error:	±0.02%F.S	安全过载Safe load limit:	150 %F.S
蠕变(30分钟) Creep(30min):	±0.02%F.S	极限过载Lateral load limit:	300 %F.S
零点平衡Zero balance:	±1 %F.S	推荐激励电压Recommend excitation:	10~12 V DC
零点温度影响TCO:	±0.02%F.S/10℃	最大激励电压Maximum excitation:	15 V DC
输出温度影响TC SPAN:	±0.02%F.S/10℃	密封等级Protection Class:	IP68
输入阻抗Input resistance:	400 ±10Ω	材质Construction:	不锈钢Stainless Steel 合金钢Alloy Steel
输出阻抗Output resistance:	352±2Ω	电缆Cable:	Length:3m Diameter: Φ5mm
			Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)