


DPS 传感器

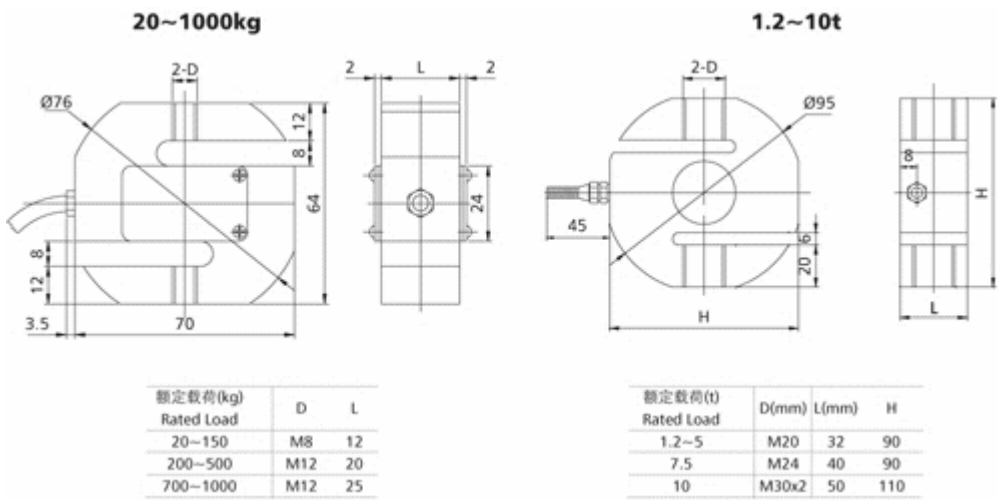

额定载荷 Rated Load	20,30,50,75,100,150,200,250,300,500,700,1000kg;1.2,1.5,2,2.5,3,3.5,7.5,10t
灵敏度 Sensitivity	2.0 ± 0.002mV/V
综合误差 Total error	± 0.02%F.S; ± 0.03%F.S
蠕变(30分钟) Creep(30min)	± 0.02%F.S
零点平衡 Zero balance	± 1%F.S
零点温度影响 TCO	± 0.02%F.S/10℃
输出温度影响 TC SPAN	± 0.02%F.S/10℃
输入阻抗 Input resistance	400 ± 10 Ω
输出阻抗 Output resistance	352 ± 2 Ω
绝缘电阻 Insulation resistance	≥5000M Ω
工作温度范围Operating Temp Range	-30~+70℃
安全过载Safe load limit	120%F.S
极限过载Over load limit	200%F.S
推荐激励电压Recommend excitation	10~12V DC
最大激励电压Maximum excitation	15V DC
密封等级Protection Class	IP67(20~1000kg),IP68(1.2~7.5t)
材质Construction	合金钢Alloy Steel
电缆Cable	
	Length:3m
	Diameter: φ 5mm(20~1000kg), φ 6mm(1.2~7.5t)